




## TCB – Total Cut & Bend



Dual Sided cut and bending unit for the full range of plastic coil diameters from 6 mm up to 50 mm - with the same bending heads!

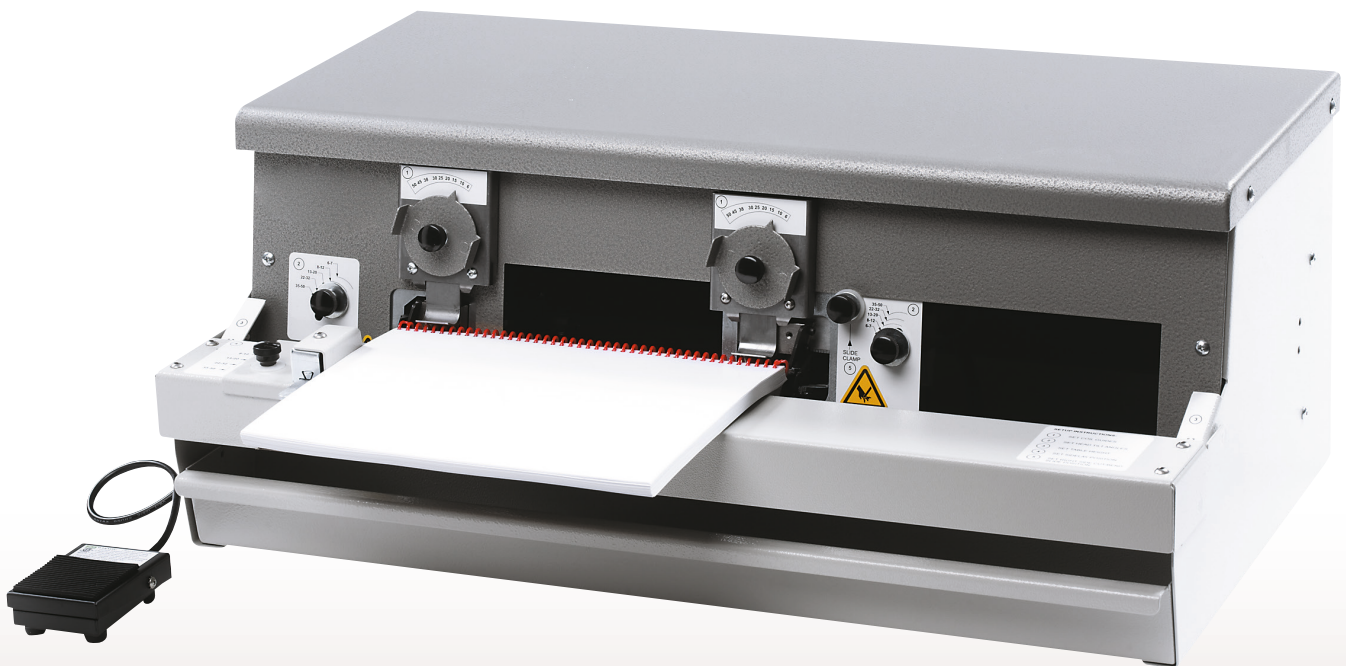

### Customer benefits:

- No tools required for size changeovers.
- Accommodates coil diameters from 6 mm to 50 mm without the need to change bending heads.
- Min/Max binding edge 140 mm - 430 mm
- Easy to follow decals guide the operator through setup.
- Removable off-cut tray makes accumulation and disposal of off-cuts neat and tidy.
- Available with electric or pneumatic actuation.
- Foot pedal operated.
- Simple dial adjustments enable you to setup, cut and bend coil diameters from 6 mm to 50 mm with the same bending heads!
- Longer bend achieved as the coil diameter increases reducing the risk of coil unwinding from the larger punch holes.
- Large top surface doubles as useable workspace.
- Easily integrated with most coil insertion equipment.



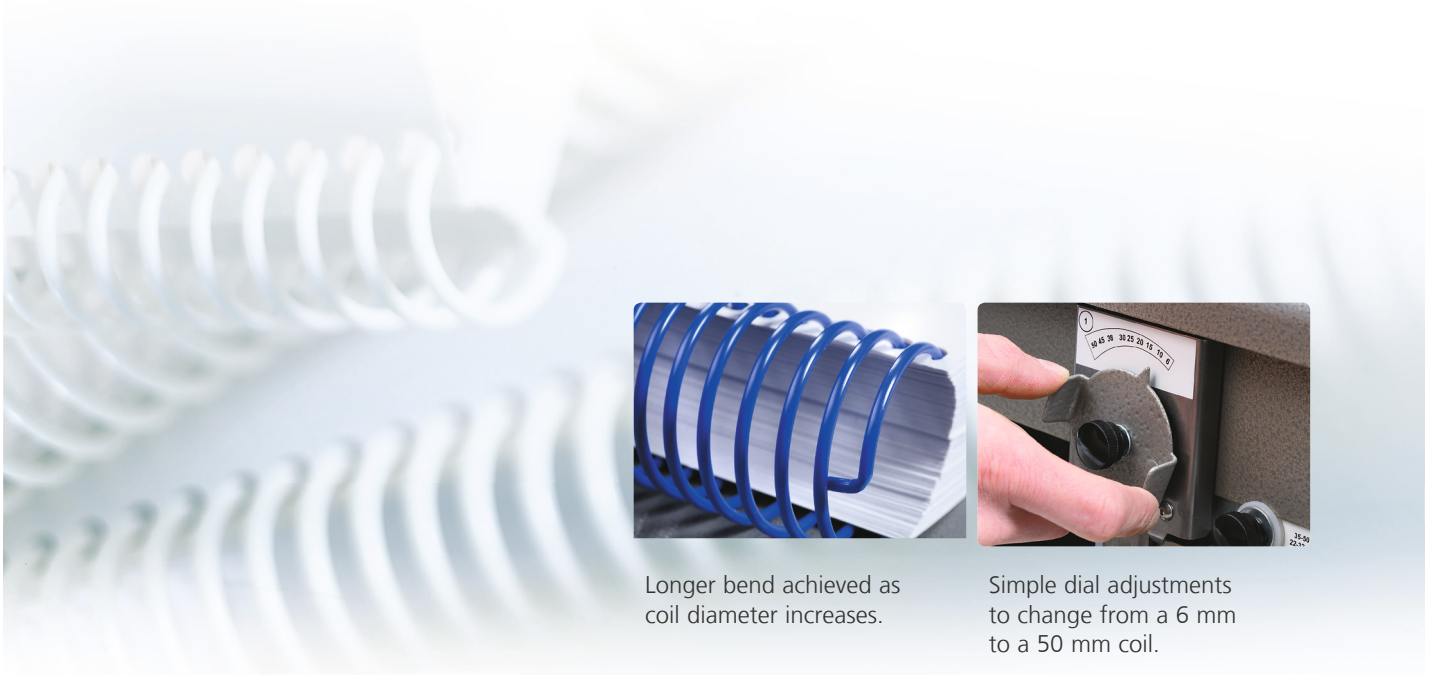

Longer bend achieved as coil diameter increases.



Simple dial adjustments to change from a 6 mm to a 50 mm coil.

Technical data:	TCB – Total Cut & Bend
Pitch:	all common
Binding element Ø:	6 - 50 mm
Min. binding edge:	140 mm
Max. binding edge:	430 mm
Operation:	Electric or pneumatic
No. of books output per hr:	350
Time required for diameter change:	1 min.
Format change without diameter:	1 min.
Machine dimensions L x W x H:	710 mm x 410 mm x 305 mm
Machine weight:	18 kg
Compressed air:	Pneumatic version - Compressed air requirements: 80 psi @ 1 cfm
Power requirement:	220 V Single Phase (electric version) 110 V Single Phase (electric version)